


			Power	Energy Integrals (A ² s)				
Powering Business Worldwide		Rating	loss (watts)	Pre-arcing	Total AT 1000Vd.c			
		2SRF1000	4.4	0.8	2.4			
		6SRF1000	6.7	27	81			
TECHI	IICAL DATA	8SRF1000	7.6	64	192			
	TRACTION	10SRF1000	3.0	118	277			
RANGE		12SRF1000	3.4	170	380			
REF.	SRF1000	15SRF1000	5.0	209	500			
CURRENT RATING		20SRF1000	5.9	675	1550			
	30 AMPS	25SRF1000	6.5	1200	2760			
SPECIFICATION		30SRF1000	7.5	1850	4300			
DRG.No.	5785109							
DRN DATE	May-85							
REV.No.	F) BRAND LOGO UPDATED FROM COOPER TO EATON							
ECN No.	BUEB19874							
REV DATE	13-09-2017							



REV	DESCRIPTION	BY	DATE	CHANGE NO.	
С	DRAWING UPDATED WITH EATON TEMPLATE	EDK	14/05/2016	BUEI4519	

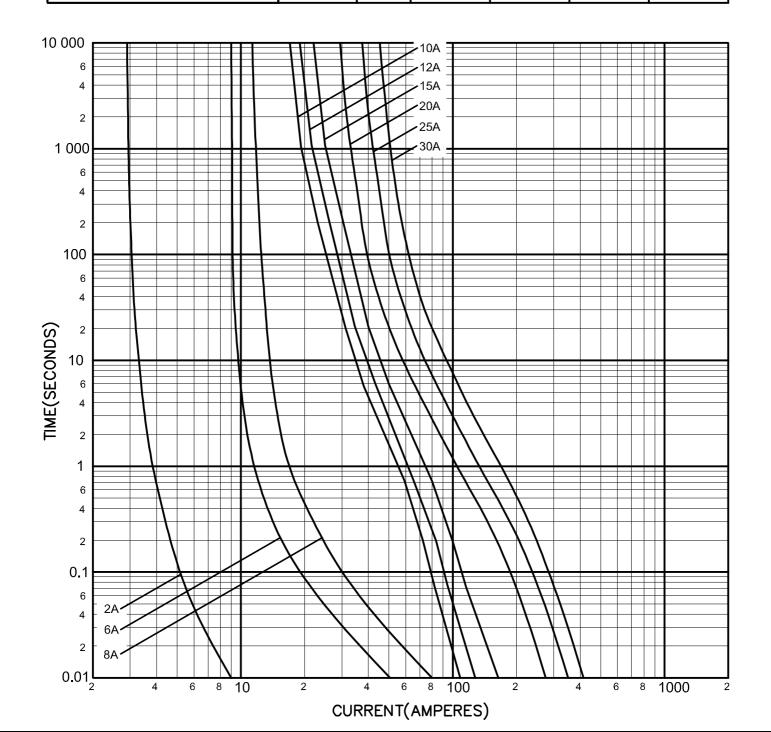

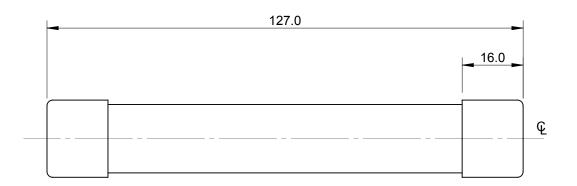



CATEGORY OF DUTY: - 1000Vd.c

										_
l z	ا _	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS.	TITLE							
MODEL VERSION:	TOLERANCES UNLESS OTHERWISE SPECIFIED: GENERAL ± 0.4mm ANGULAR ± 1° OUTLINE FOR SRF1000 FUSE LINKS (2-30A)					KS	Powering Business Worldwide			
		UNCONTROLLED COPY	RAG	14/06/2013		NTS	ANGLE: THIRD	SIZE:	- Towering Dusiness Wondwide	template A4 :
SOURCE FILE:	AND MUST NOT BE COPIED OR PASSED ON TO		MATERIAL: VARIOUS		NONE				EATON Burton-on-the-Wolds, Leics, LE12 5TH Tel +44 1509 882 600	
A THIRD PARTY WITHOUT WRITTEN CONSENT			11			DWG NO: 5778871			REV: C SHEET: 1 OF 1	Drawing