

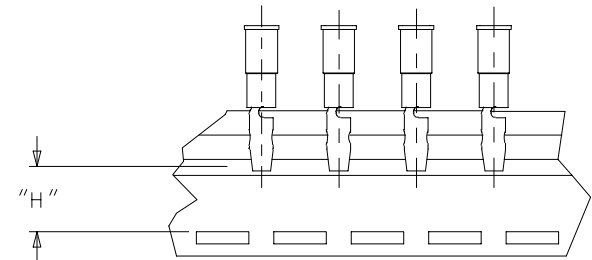


LOOSE PIECE		TAPE MOUNTED		WIRE RANGE AWG	INSULATION COLOR	I.D. MIN.	PLUG DIA.	MAX "L"	"MWID"	"H" ±.010/0.25
MATERIAL NO.	ENG. NO.	MATERIAL NO.	ENG. NO.							
190350001	A-559	190350002	A-559T	18-22	RED	.056/1.42	.180/4.57	1.046/26.57	.140/3.56	.495/12.57
190350003	A-569	190350004	A-569T	18-22	RED	.056/1.42	.156/3.96	.986/25.04	.140/3.56	.555/14.10
190350005	B-579	190350008	B-579T	14-16	BLUE	.084/2.13	.180/4.57	1.046/26.57	.170/4.32	.495/12.57
190350009	B-589	190350012	B-589T	14-16	BLUE	.084/2.13	.156/3.96	.986/25.04	.170/4.32	.555/14.10

©

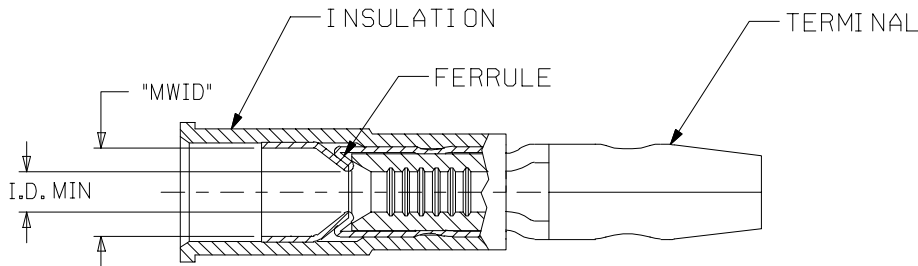

TAPE MOUNTING DETAIL

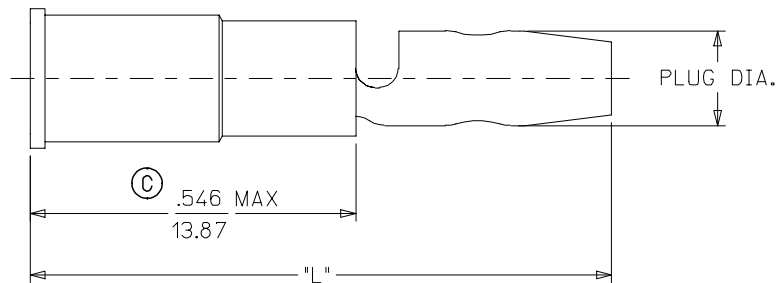

SALES DRAWING

NOTE:

1. TERMINAL: MATERIAL COPPER .032 MAX
FINISH: ELECTRO-TIN.
FERRULE : MATERIAL: BRASS
FINISH: ELECTRO-TIN.
INSULATION: NYLON.
2. MWID = MAXIMUM WIRE INSULATION DIAMETER.
3. ASSEMBLY IS ROHS COMPLIANT.

CORRECTED DIM. & ADDED ROHS
EC NO: ETC2007-0397
DRW: NEHLE 2007/04/27
CHKD: JMACNEIL 2007/05/09
APPR: JMACNEIL 2007/05/10

QUALITY SYMBOLS
▽=0
▽=0

	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .010	± .0010
2 PLACES	± 0.13	± .01
1 PLACE	± 0.25	± .01
ANGULAR		±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
IN/MM		---	INCH	☉
DRAWN BY	DATE	TITLE		
BRE	2003/02/13	MALE BULLET SNAP PLUG, MOLDED, AVIKRIMP		
CHECKED BY	DATE	MOLEX INCORPORATED		
HEB	2003/02/13	SD-19035-001		
APPROVED BY	DATE	SHEET NO.		
RWD	2003/02/13	1 OF 1		
MATERIAL NO.	DOCUMENT NO.	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
SEE CHART	SD-19035-001			