

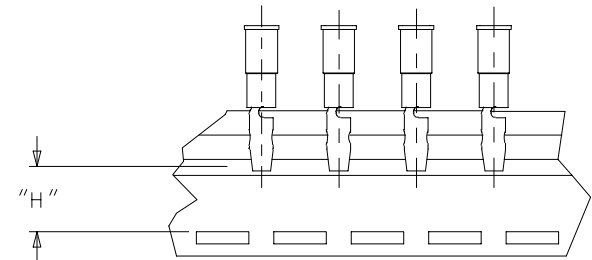


LOOSE PIECE		TAPE MOUNTED		WIRE RANGE AWG	INSULATION COLOR	I.D. MIN.	PLUG DIA.	MAX "L"	"MWID"	"H" ±.010/0.25
MATERIAL NO.	ENG. NO.	MATERIAL NO.	ENG. NO.							
190350001	A-559	190350002	A-559T	18-22	RED	.056/1.42	.180/4.57	1.046/26.57	.140/3.56	.495/12.57
190350003	A-569	190350004	A-569T	18-22	RED	.056/1.42	.156/3.96	.986/25.04	.140/3.56	.555/14.10
190350005	B-579	190350008	B-579T	14-16	BLUE	.084/2.13	.180/4.57	1.046/26.57	.170/4.32	.495/12.57
190350009	B-589	190350012	B-589T	14-16	BLUE	.084/2.13	.156/3.96	.986/25.04	.170/4.32	.555/14.10

©

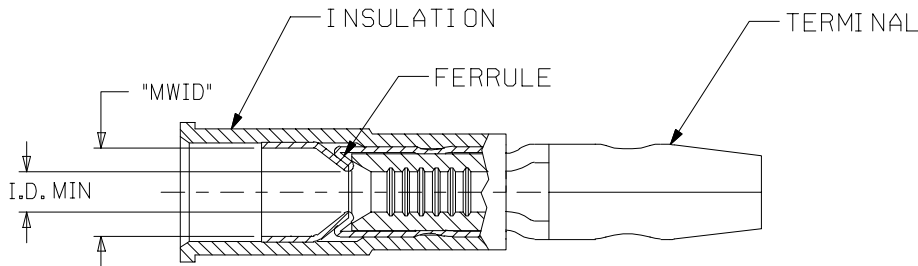

TAPE MOUNTING DETAIL

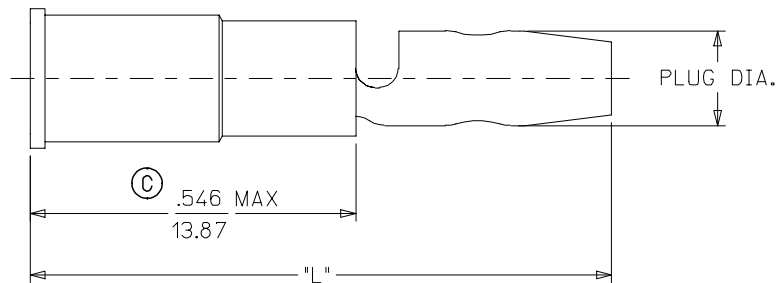

SALES DRAWING

NOTE:

1. TERMINAL: MATERIAL COPPER .032 MAX
FINISH: ELECTRO-TIN.
FERRULE : MATERIAL: BRASS
FINISH: ELECTRO-TIN.
INSULATION: NYLON.
2. MWID = MAXIMUM WIRE INSULATION DIAMETER.
3. ASSEMBLY IS ROHS COMPLIANT.

CORRECTED DIM. & ADDED ROHS
EC NO: ETC2007-0397
DRW: NEHLE 2007/04/27
CHKD: JMACNEIL 2007/05/09
APPR: JMACNEIL 2007/05/10

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	
mm	INCH
4 PLACES ± ---	± ---
3 PLACES ± ---	± .005
2 PLACES ± 0.13	± .01
1 PLACE ± 0.25	± ---
ANGULAR ±1/2°	

DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE IN/MM	
DRAWN BY	DATE
BRE	2003/02/13
CHECKED BY	DATE
HEB	2003/02/13
APPROVED BY	DATE
RWD	2003/02/13
MATERIAL NO. SEE CHART	

SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
TITLE MALE BULLET SNAP PLUG, MOLDED, AVIKRIMP		
MOLEX INCORPORATED		
MATERIAL NO. SD-19035-001	DOCUMENT NO.	SHEET NO. 1 OF 1
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		