
MODEL: PDU3V20D354B

3-Phase Power Strip for Automatic Transfer Switch Installations



- Vertical power strip distributes power when connected to Tripp Lite ATS PDU models PDU330AT6L21, PDU330AT6L15, PDU330AT6L2130, PDU330AT6L1530 and PDU350AT6H50.
- Supports up to 8.6kW total output with 13.9A maximum per output bank when connected to 208V ATS models with a 24A input rating
- Supports up to 12.6kW total output with 20A maximum per output bank when connected to 208V ATS models with a 35A input rating

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS

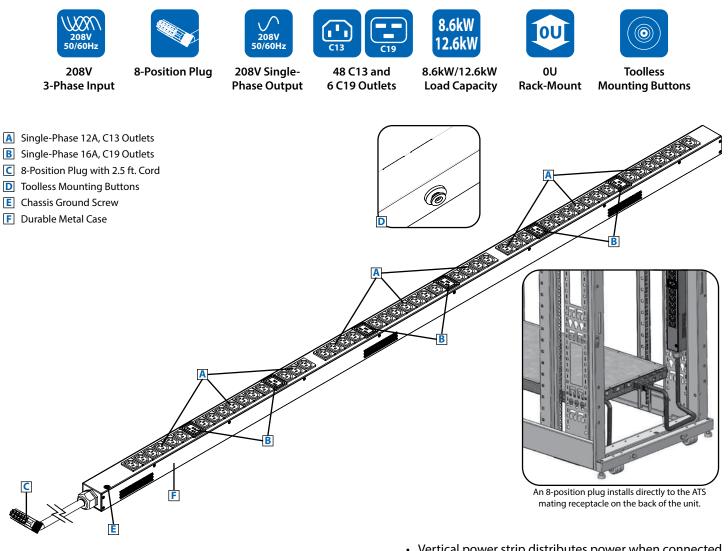

1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

Specifications	
Model	PDU3V20D354B
Voltage	208V (3-Phase Input/Single-Phase Output)
Frequency	50/60 Hz
Load Capacity	8.6 or 12.6kW (depending on ATS PDU model)
Input Plug	8-Position Plug with 7-Conductor Cord
Input Cord Length	2.5 ft. / 0.8 m
Outlets	(x48) C13, (x6) C19
Primary Mounting Options	0U (Vertical) Rack-Mount
Unit Dimensions (H x W x D)	70 x 2.2 x 2.2 in. / 1778 x 56 x 56 mm
Unit Weight	9.3 lb. / 4.2 kg
Standards	Tested to UL 60950-1 (USA), CSA (Canada), NOM (Mexico), FCC Class A (Emissions), ROHS
Tripp Lite bas a policy of continuous imr	provement. Specifications are subject to change without notice

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

