

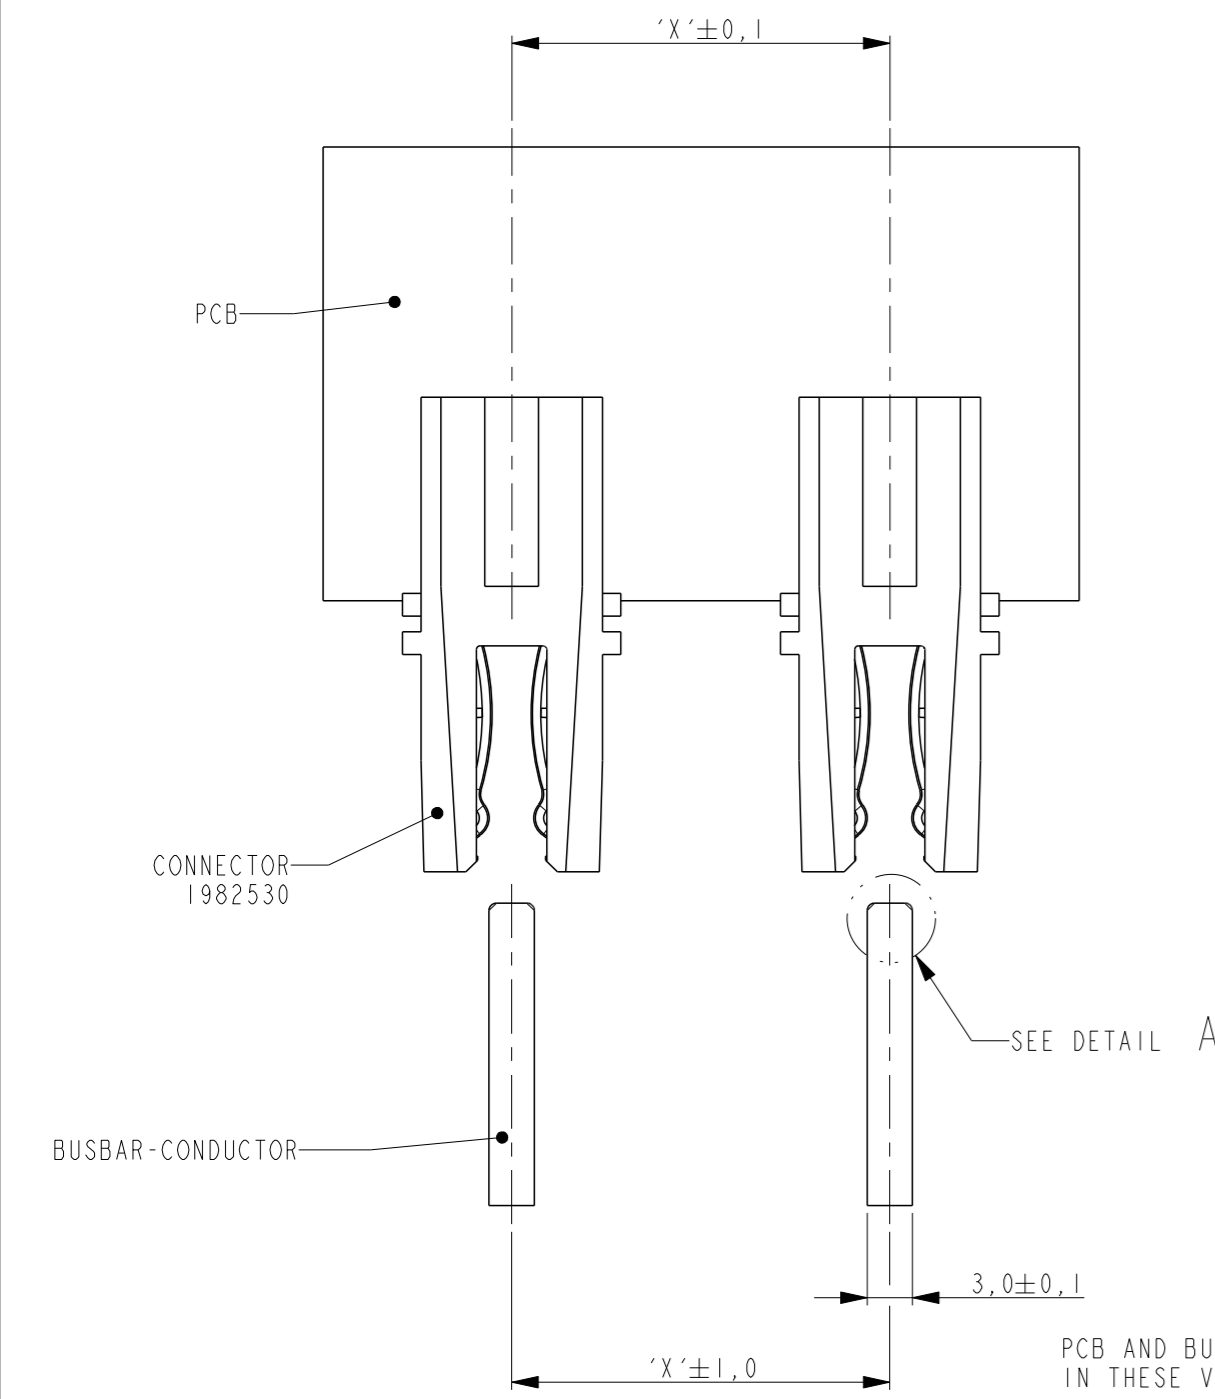
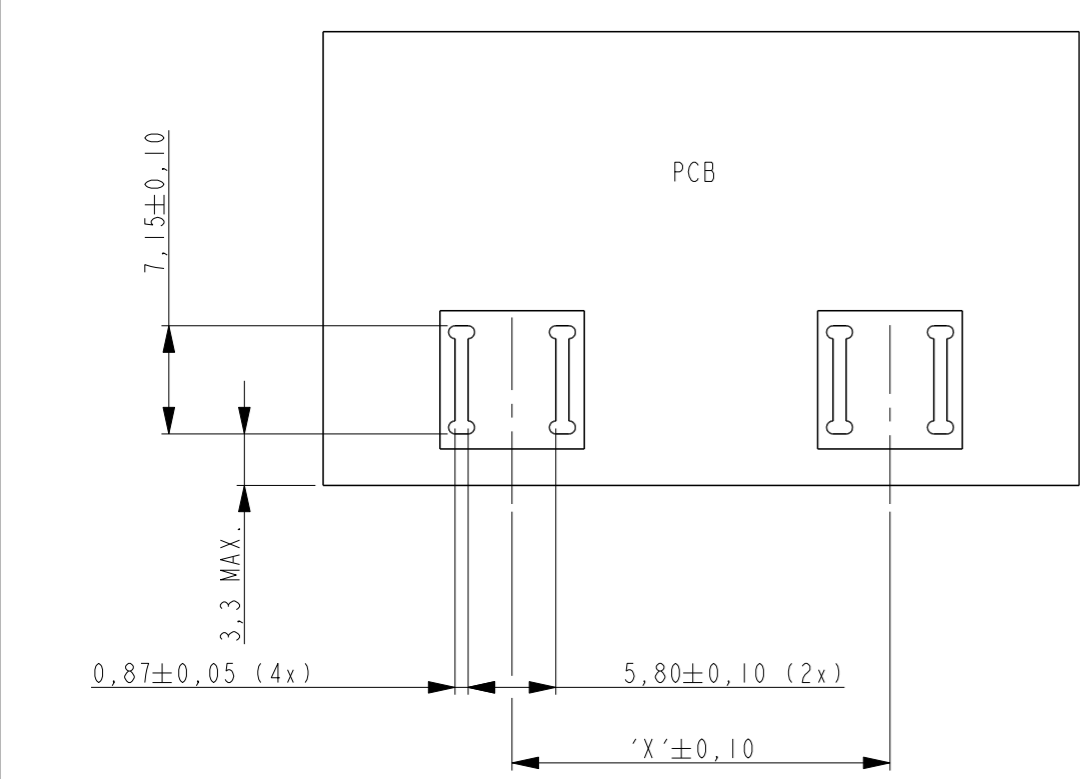
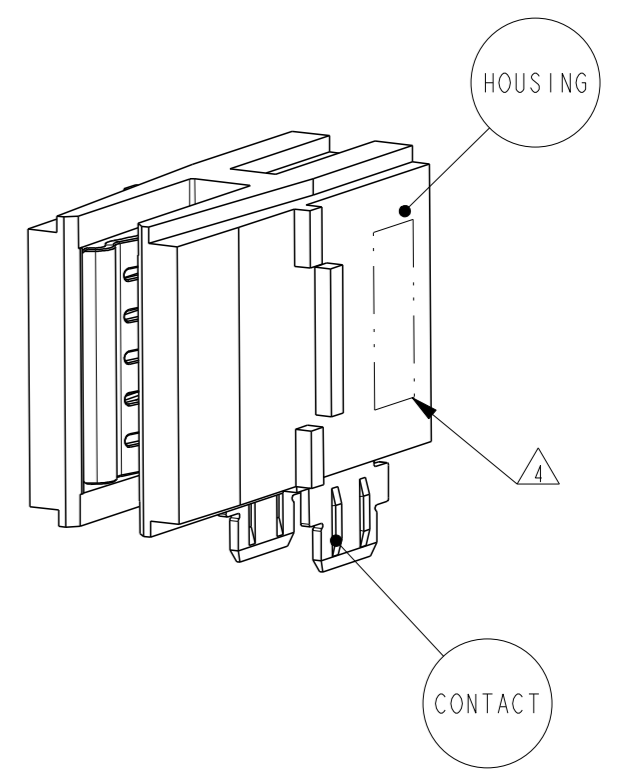


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY - ALL RIGHTS RESERVED.




LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A3		REV PER ECR-15-005882	20APR2015	ML	SZ

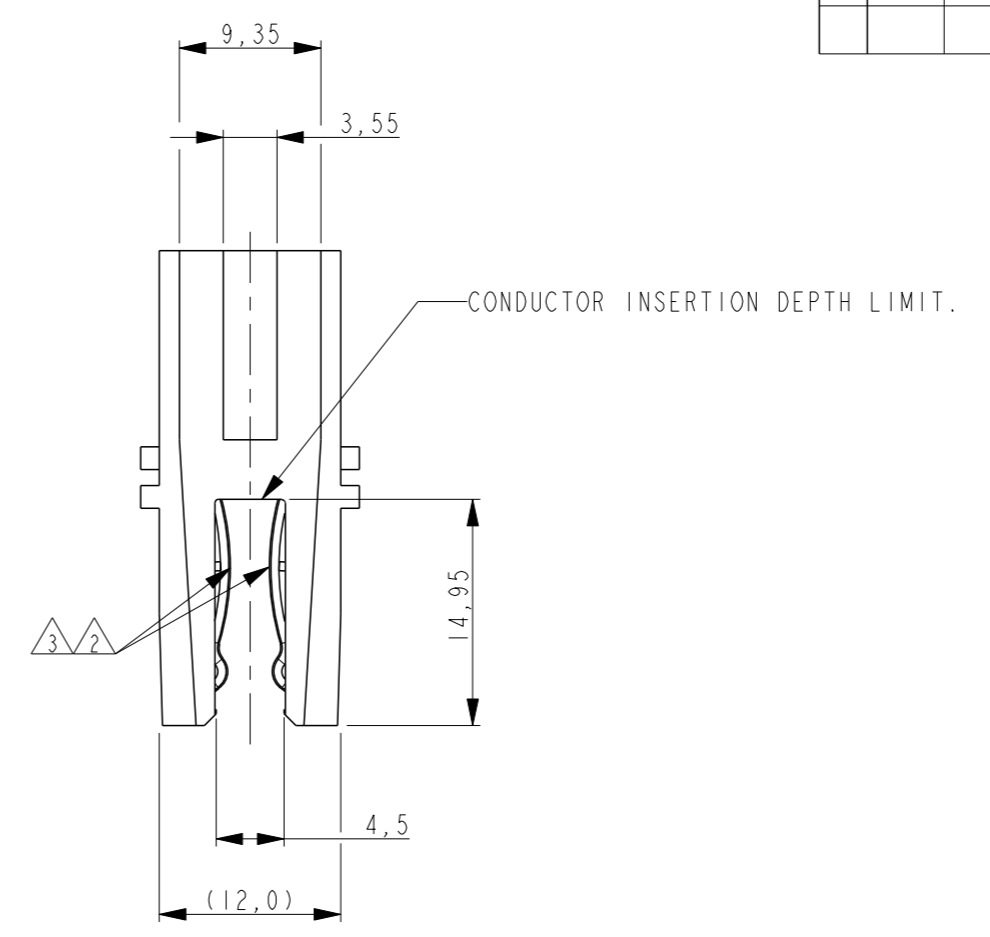

PCB AND BUSBAR-CONDUCTORS, IN THESE VIEWS ARE SHOWN FOR REFERENCE ONLY.

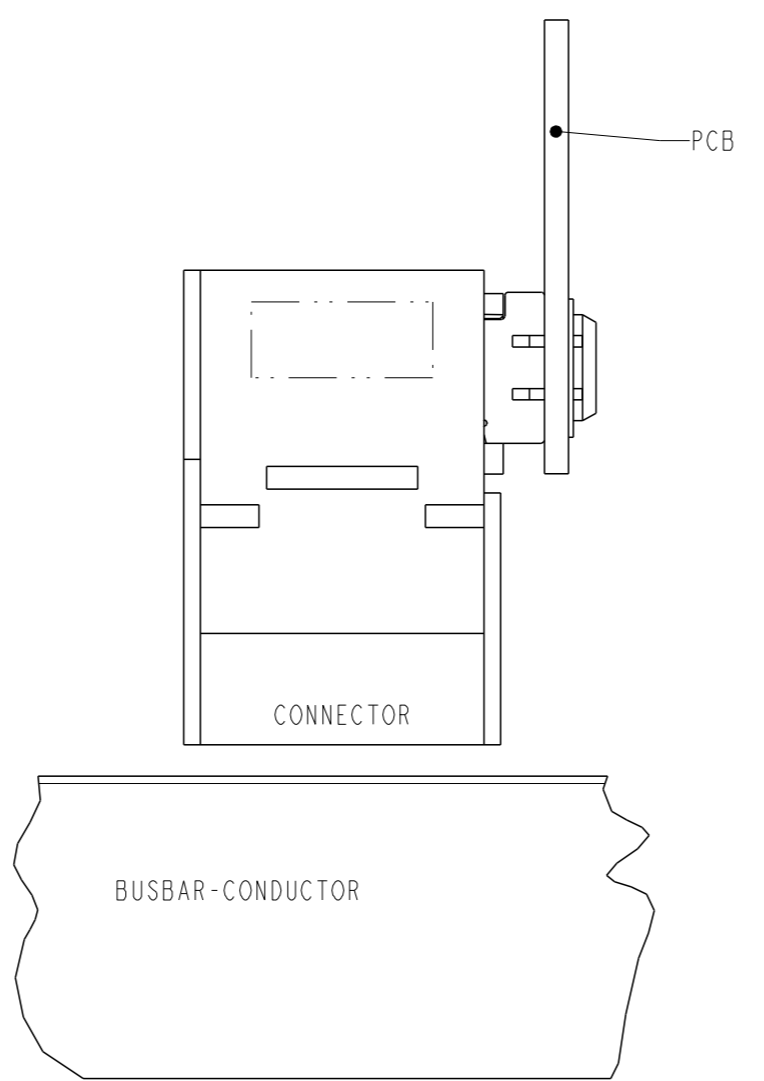

RECOMMENDED PCB LAY-OUT
THICKNESS: 1,5 - 2,0mm

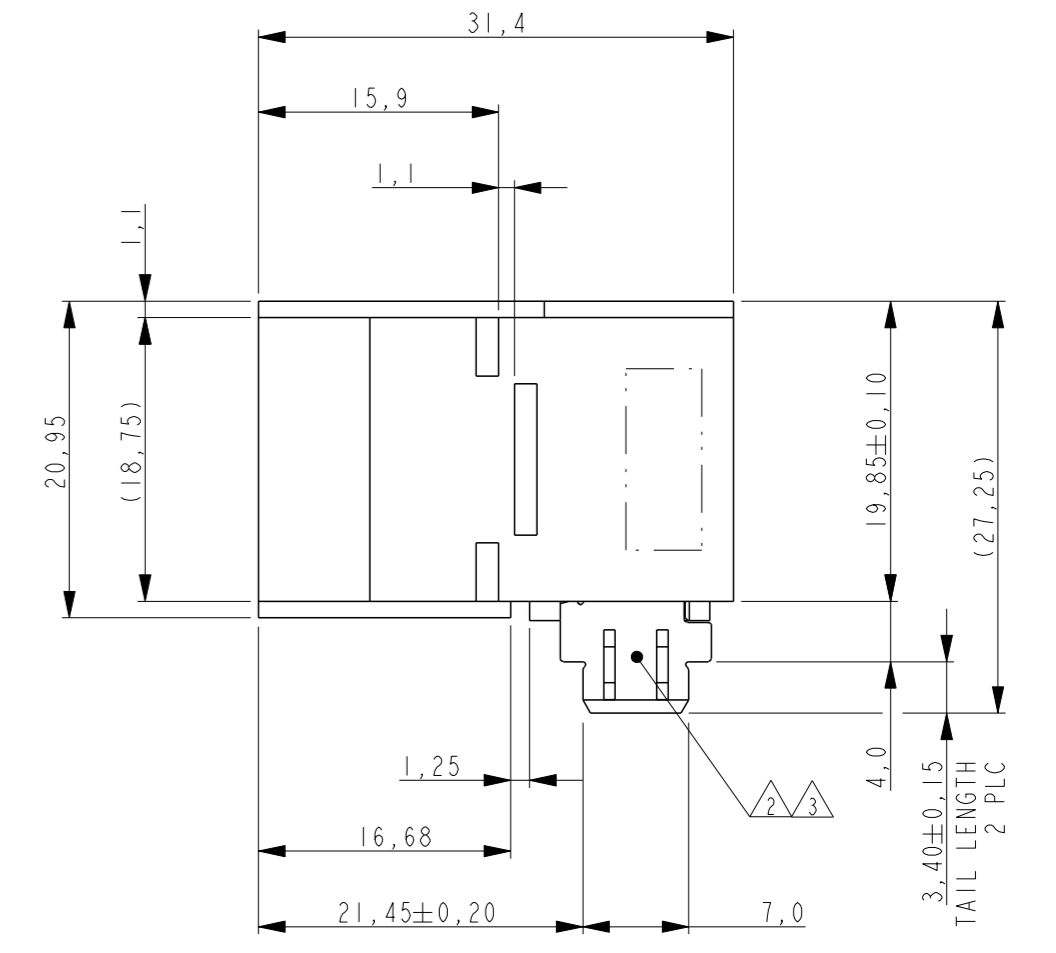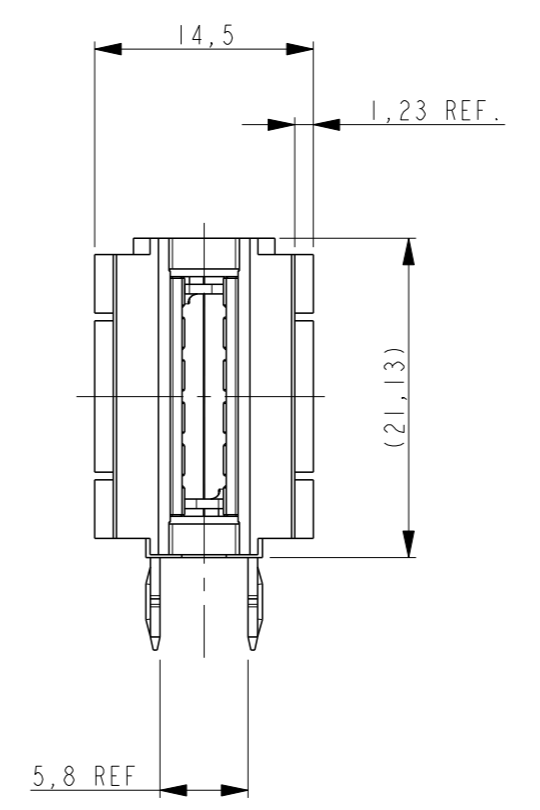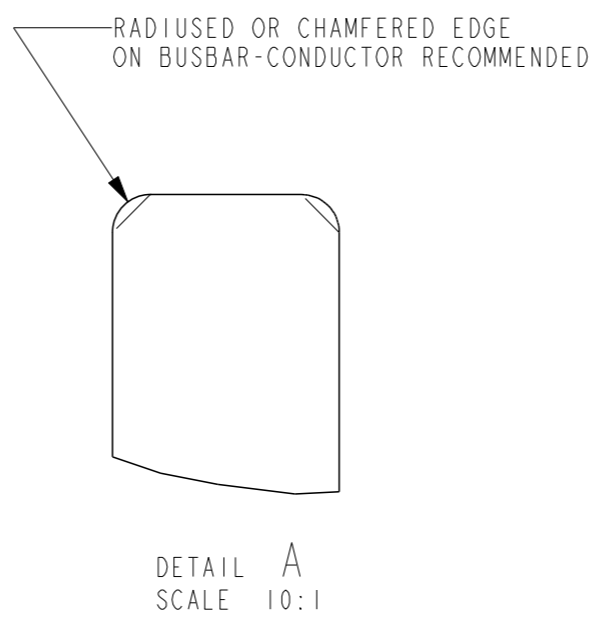

- NOTES:
- 1 PCB MUST BE SUPPORTED WHILE INSERTING THE CONNECTOR IN THE SLOTS TO AVOID BENDING OF THE BOARD.
 - 2 PLATING: 1,2µm MIN. NICKEL UNDERLAYER ALLOVER.
 - 3 3,0µm MIN. TIN IN INDICATED AREA'S.
 - 4 AREA FOR DATE-CODE.
 5. MATERIAL:
HOUSING: THERMOPLASTIC, BLACK, UL94 V-0
POWER CONTACT: HIGH CONDUCTIVITY COPPER ALLOY
 - 6 LUBRICANT ON CONTACT MATING AREA.

6	CROWN CLIP JUNIOR SOLDER VERSION W/ LUBRICANT	2178517-2	2
	CROWN CLIP JUNIOR SOLDER VERSION	2178517-1	1
	DESCRIPTION	PART NUMBER	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SUDHAKAR 09 Jan 13	TE Connectivity			
DIMENSIONS: mm		CHK SUDHAKAR 09 Jan 13				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD RAJENDRA 09 Jan 13	NAME			
		PRODUCT SPEC	PLUGGABLE BUSBAR CONNECTOR SOLDER VERSION CROWN CLIP JUNIOR			
MATERIAL		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		108-19360	A2	00779	C=2178517	-
		114-19128	SCALE	SHEET	OF	REV
		WEIGHT	2:1	1	1	A3
		Customer Drawing				